





(877) 794-1802


RWM SERIES, WATER MISER REMOTE MECHANICAL FLOAT/OVERFLOW UNIT



PHOTO NOTE:
UNIT SHOWN WITH INTERNAL FLOAT VALVE ASSEMBLY REMOVED.

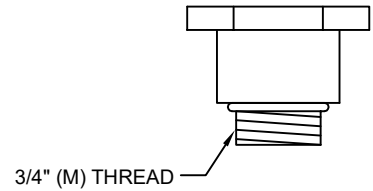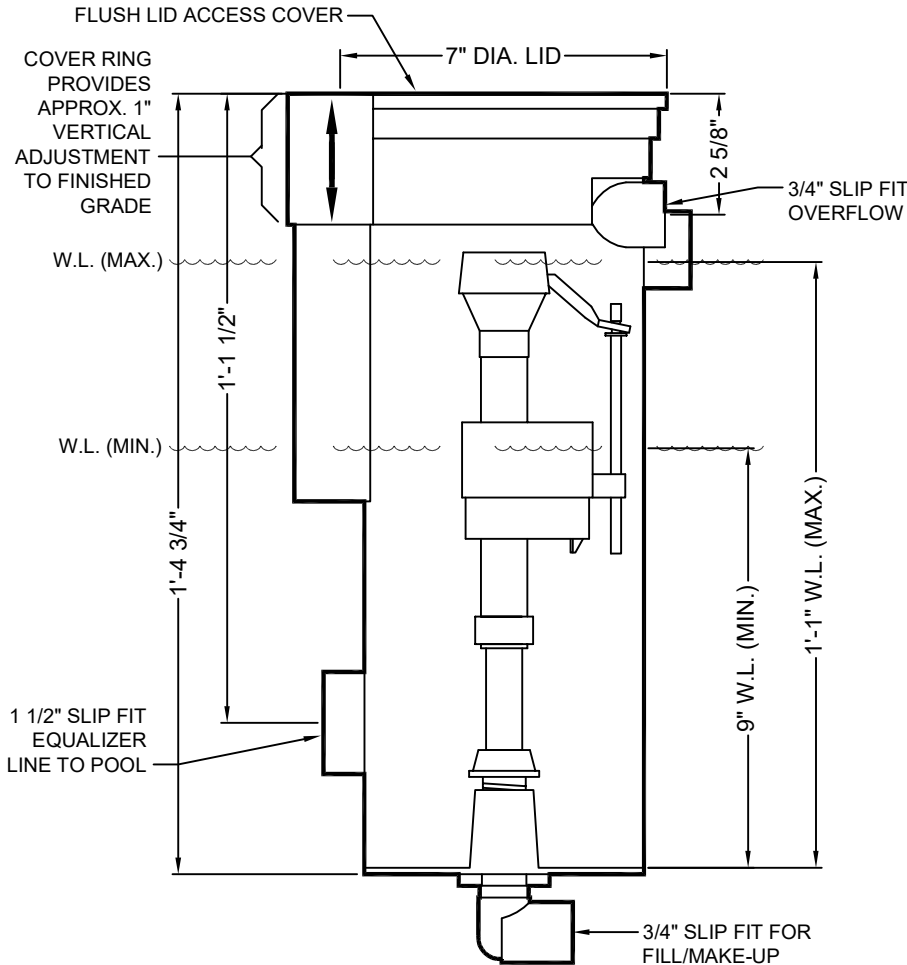

TEST PLUG INCLUDED

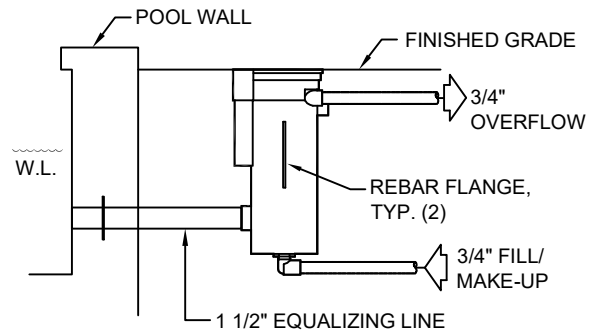

INSTALLATION ORIENTATION DIAGRAM

SPECIFICATION DATA: Remote Mechanical Float/Overflow Unit; ABS float with black injection molded housing with flush cover lid and vertical adjustment collar, adjustable mechanical float valve with debris screen, re-bar attachment flanges, 3/4" slip overflow fitting, 3/4" slip water inlet fitting (from backflow preventer protected supply), 1-1/2" slip equalizer fitting.

DESIGN/APPLICATION DATA: RWM-Series; Remote Mechanical Fill Device, is used to fill and maintain pool water level in small to medium single level pools where pool concrete thickness is not adequate to install unit into pool wall.

NOTES: 1. Due to continuing product improvement program, Roman Fountains reserves the right to change the specifications without notice.