




(877) 794-1802

# RYS SERIES, THREADED END 'WYE' STRAINER

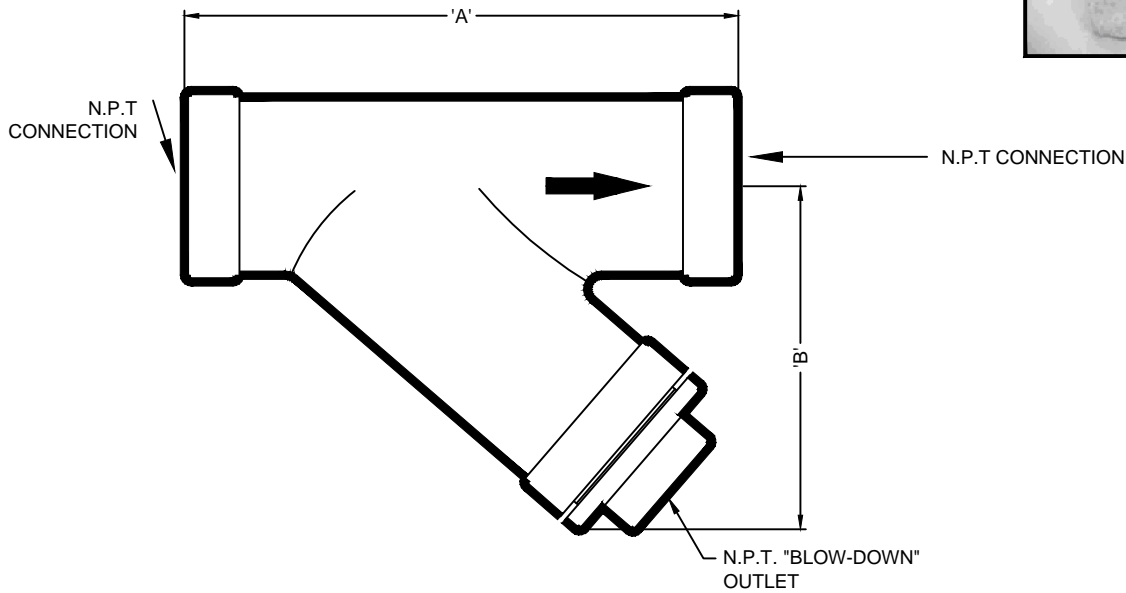

TECHNICAL DATA					
MODEL NO.	CONNECTION N.P.T.	BLOW-DOWN N.P.T.	DIMENSIONS		PRESSURE (WATER) & OPERATING TEMP.
			'A'	'B'	
RYS-050	1/2"	3/8"	3-3/16"	2-3/16"	200 PSI @ 150° F
RYS-075	3/4"	3/8"	4"	2-3/4"	200 PSI @ 150° F
RYS-100	1"	1/2"	4-1/2"	3"	200 PSI @ 150° F
RYS-125	1-1/4"	1/2"	5-5/16"	3-1/2"	200 PSI @ 150° F
RYS-150	1-1/2"	1/2"	6-1/4"	3-7/8"	200 PSI @ 150° F
RYS-200	2"	1/2"	7-1/2"	5-7/16"	200 PSI @ 150° F
RYS-250	2-1/2"	1/2"	9"	5-7/8"	200 PSI @ 150° F
RYS-300	3"	1/2"	10-3/16"	6-5/16"	200 PSI @ 150° F

**SPECIFICATION DATA:** Threaded End 'WYE' Strainer; Machined cast bronze ATSM B-62 body and blow-off outlet, T304 stainless steel 20 mesh screen, non-asbestos fiber gasket, machined bronze ASTM B-62 blow-off cover. Female thread connections.

**DESIGN/APPLICATION DATA:** RYS Series bronze 'wye' strainers are used on discharge lines to intercept line debris before entering nozzles or dirt-sensitive valves, etc. The self-cleaning feature precludes the need for line disassembly.

**NOTE:** Due to continuing product improvement program, Roman Fountains reserves the right to change the specifications without notice.

DRAWING NO.  
**3.606**  
R1\_09-14-18