




SPLASHLIGHT-SH-24VDC; NON-SEQ.  
NOZZLE/LED LIGHT ASSEMBLY/  
SLAB HANGER

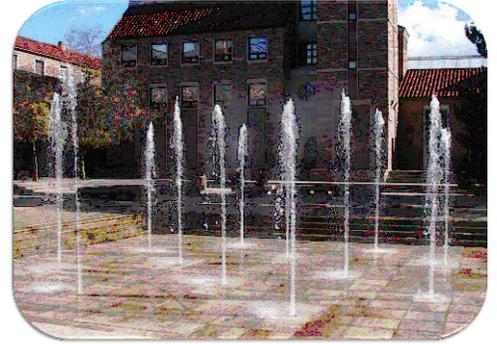

**24VDC**  
**LED**

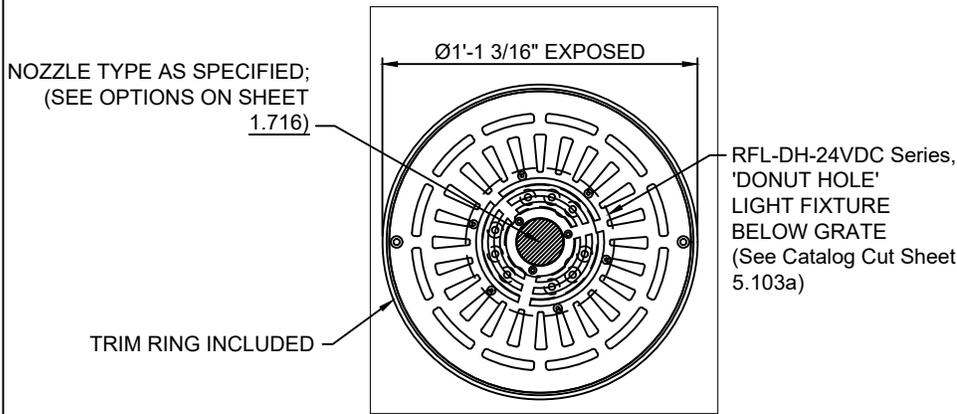

PLAN VIEW

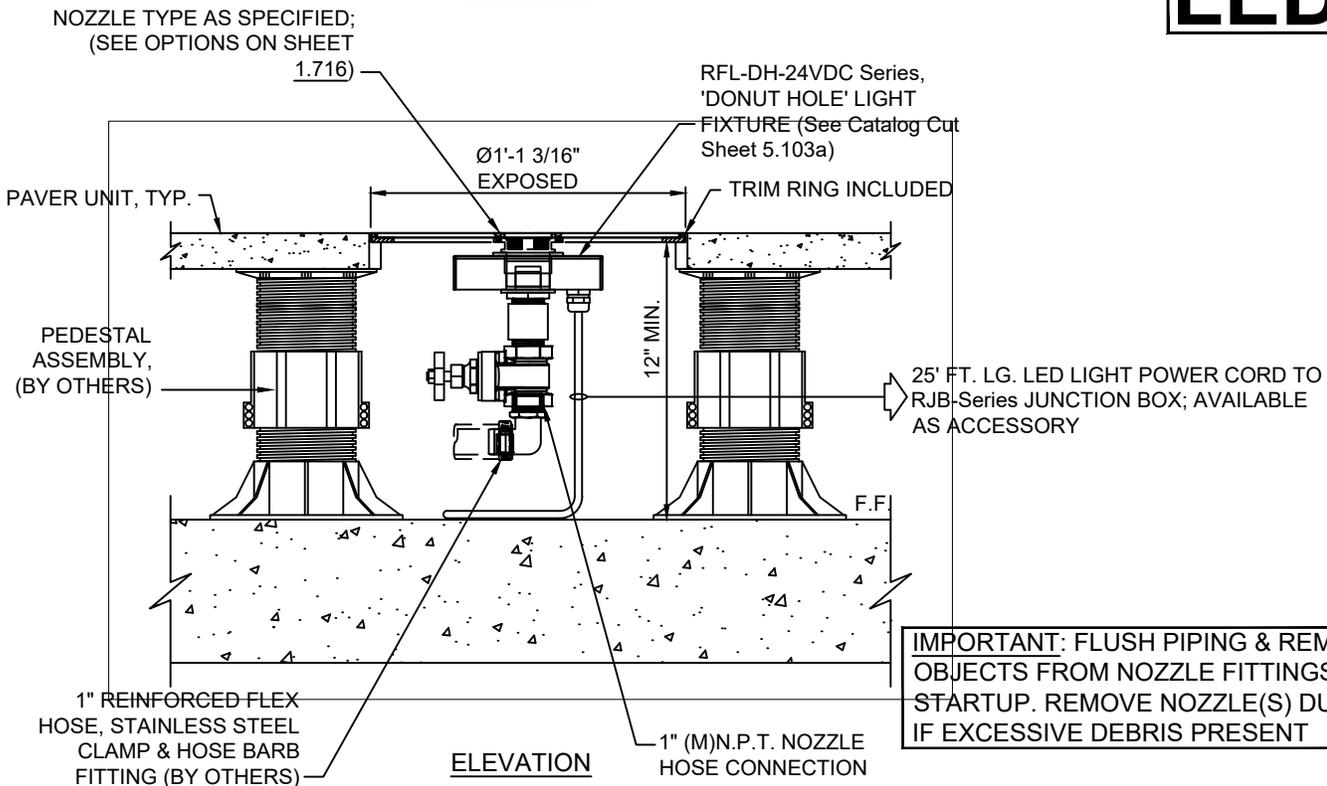

ELEVATION

**IMPORTANT: FLUSH PIPING & REMOVE FOREIGN OBJECTS FROM NOZZLE FITTINGS PRIOR TO STARTUP. REMOVE NOZZLE(S) DURING FLUSH IF EXCESSIVE DEBRIS PRESENT**

**SPECIFICATION DATA:** Hanger-Mounted, Nozzle/LED Light assembly shall be constructed of stainless steel with stainless fasteners and includes decorative stainless steel grate nozzle assembly with manual brass balancing valve and one (1) RFL-DH-24VDC Series, Light Fixture (available with WHITE or RGBW LED's) with 25 FT. of 18 AWG SJOW cable.

**DESIGN/APPLICATION DATA:** Hanger-Mounted Nozzle/LED Light assembly is water level independent and is available with one of six interchangeable nozzle spray patterns. When used in groups, these nozzles can produce a variety of effects when nozzle groups are piped below deck in various patterns and switched on and off via sequenced controller and remote solenoid valves (both items are available as accessories). The nozzle groups can also produce varying stream heights when used in conjunction with a sequenced variable speed pump drive (VFD's also available as an accessories).

**NOTES:**

1. U.L. Listed light fixture
2. For Nozzle Hydraulic Data, see Catalog Sheet numbers: 1.716.
3. LED Light Fixture (White or RGBW) requires 24VDC power supply; RGBW unit also requires DMX driver.
4. Due to continuing product improvement program, Roman Fountains reserves the right to change the specifications without notice.