



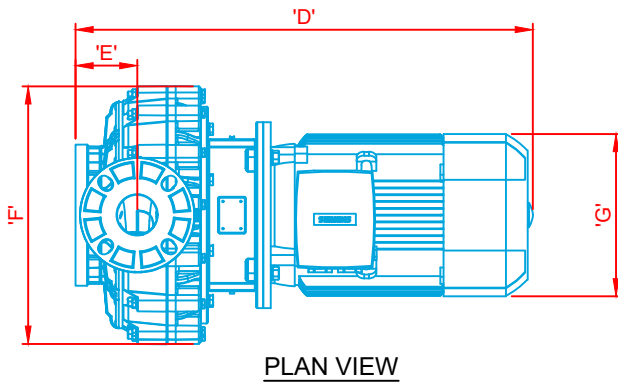


(877) 794-1802

# RSPP-N SERIES, SELF-PRIMING PUMP

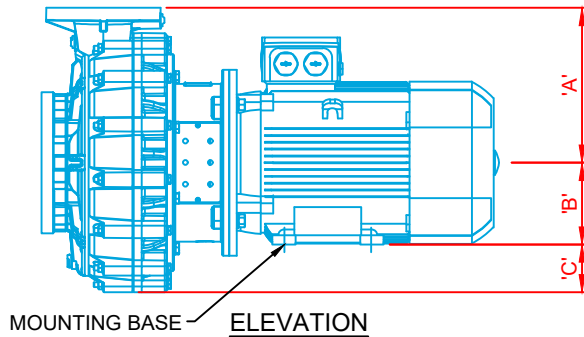

HYDRAULIC DATA      1750 RPM

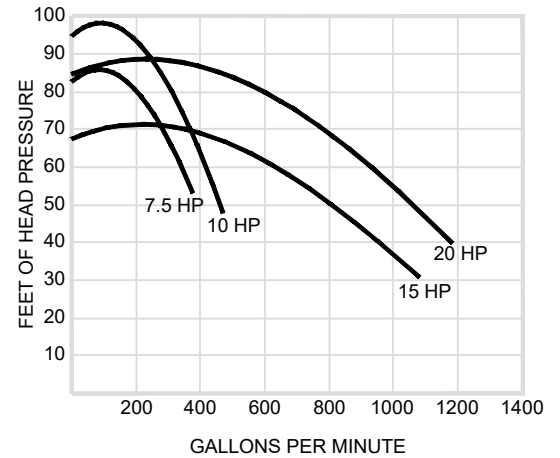

TECHNICAL AND HYDRAULIC DATA										
MODEL NO.	HP	Dim. 'A'	Dim. 'B'	Dim. 'C'	Dim. 'D'	Dim. 'E'	Dim. 'F'	Dim. 'G'	Suct./Disch. (F) N.P.T.	Power Req.
RSPP-N-750-3	7.5	9.8"	5.2"	3.0"	*29.1"	3.9"	16.4"	10.1"	4" x 3"	208-230/460V, 3Ø
RSPP-N-1000-3	10	9.8"	5.2"	3.0"	*29.1"	3.9"	16.4"	10.1"	4" x 3"	208-230/460V, 3Ø
RSPP-N-1500-3	15	11.0"	6.3"	2.8"	*34.1"	5.5"	18.0"	11.8"	6" x 4"	208-230/460V, 3Ø
RSPP-N-2000-3	20	11.0"	6.3"	2.8"	36.4"	5.5"	18.0"	11.8"	6" x 4"	208-230/460V, 3Ø

\*Motor length may vary. Provide reserve space for expansion

**SPECIFICATION DATA:** Self-priming pump; high performance plastic (THK) housing; optional all plastic strainer basket; non-corrosive plastic impeller with heavy duty mechanical shaft seal; equipped with stainless steel shaft extension; heavy duty energy efficient totally enclosed fan-cooled (TEFC) motor.

- NOTES:**
1. Pump motor must be adequately guarded against heat, dirt and moisture.
  2. Pump room must be ventilated at a rate of 25 CFM per horsepower.
  3. Maximum recommended suction lift: 4' above lowest pool water level; suction side of pump will require a check valve for self-priming applications (By Installer).
  4. Due to continuing product improvement program, Roman Fountains reserves the right to change the specifications without notice.

DRAWING NO.  
**3.112**