


(877) 794-1802



OPTIONAL MOUNTING CHANNEL

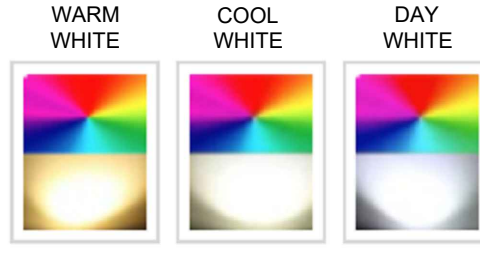

PLAN VIEW



ELEVATION VIEW

TECHNICAL DATA						
MODEL NO.	CUT POINTS	LIGHT COLOR	OUTPUT LUMENS	MAXIMUM LENGTH	POWER USAGE	LED CHIPS
RFL-SL-RGBWW-24VDC-XX	4"	RED/GREEN/BLUE/ WARM WHITE (3000K)	360/FT. <small>(VARIES BY LED COLOR)</small>	16.4 FT.	4.4 WATTS/FT	18/FOOT
RFL-SL-RGBCW-24VDC-XX	4"	RED/GREEN/BLUE/ COOL WHITE (4000K)	360/FT. <small>(VARIES BY LED COLOR)</small>	16.4 FT.	4.4 WATTS/FT	18/FOOT
RFL-SL-RGBDW-24VDC-XX	4"	RED/GREEN/BLUE/ DAY WHITE (6000K)	360/FT. <small>(VARIES BY LED COLOR)</small>	16.4 FT.	4.4 WATTS/FT	18/FOOT

IMPORTANT NOTE: "XX" in Model No. above denote length in inches.



SPECIFICATION DATA: 24VDC; U.L. Listed LED Linear Strip Lighting; submersible/waterproof IP68 rated with 120 beam angle; SMD 5050 LED chips (Red/Blue/Green/White); custom cut per project in 4" increments; 25' cable length. Mount with silicone adhesive caulk (not included) or optional mounting track. Requires DMX driver for color changing (sold separately). Lamp life: up to 50,000 hrs.

Optional aluminum mounting channel, 0.81" wide and 0.35" deep, comes in 6.5 foot lengths with clear or frosted polycarbonate lens.

- NOTES:**
- 24VDC Power supply required to operate fixtures. Contact factory for requirements.
 - Due to our continuing product improvement, Roman Fountains reserves the right to change the specifications without notice.
 - Use in dry, damp or wet conditions.

DRAWING NO.
5.117