





(877) 794-1802

# RWC-A-DUL, 3-CUP ANEMOMETER

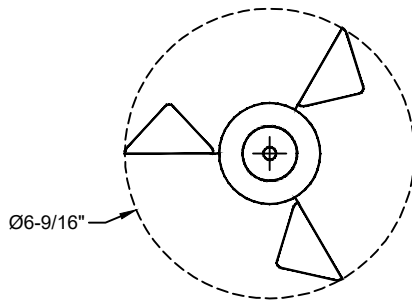

ANEMOMETER TOP VIEW

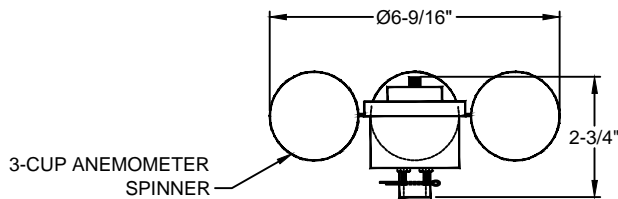

ANEMOMETER ELEVATION



MOUNTING SUGGESTION



**SPECIFICATION DATA:** Molded 3-cup ultraviolet protected polycarbonate anemometer. Rotor shaft is supported by a beryllium copper shaft riding on Teflon bearings.

**DESIGN/APPLICATION DATA:** Roman Fountains RWC-A Series, anemometers are designed for use in fountains where reduction and/or system shutdown is required due to heavy wind conditions which may cause the water to blow out of the pool. Must be used in conjunction with RWC-Series Wind Controls.

- NOTES:**
1. A minimum 18-3 shielded cable is required (by installer) to connect anemometer to control. Limit run to 200' in dedicated conduit. Use Belden 8770 cable, or equal.
  2. This anemometer to be used with RWC-SM-DUL, wind control unit on catalog sheet 3.401.
  3. Mount anemometer at height equal to maximum spray height and as close to fountain pool as possible.
  4. Mount control panel in a secure, weather protected area.
  5. Due to continuing product improvement program, Roman Fountains reserves the right to change the specifications without notice.

DRAWING NO.  
**3.402**