




(877) 794-1802

RBB-T SERIES, THREADED BRASS BALL VALVE



Appearance may vary according to size and supply available.

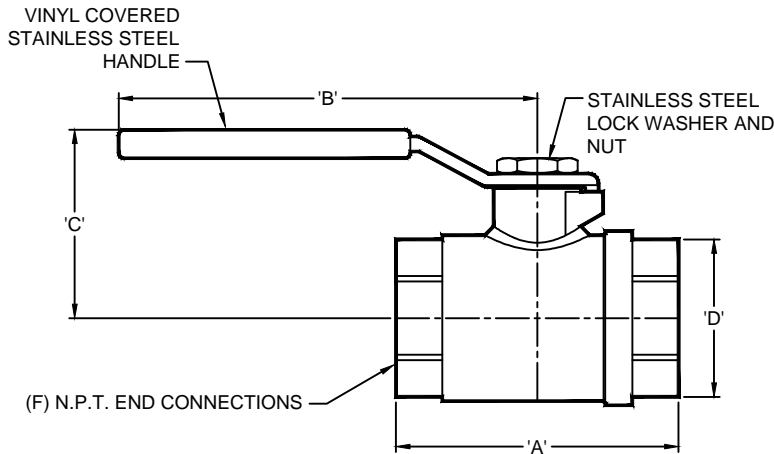

For submersible applications, remove handle and store in safe place after adjustment.

TECHNICAL DATA					
MODEL NO.	SIZE	A	B	C	D
RBB-050-T	1/2"	2 5/16"	3 15/16"	1 11/16"	1"
RBB-075-T	3/4"	2 1/2"	4 23/32"	2"	1 7/32"
RBB-100-T	1"	3 3/16"	4 23/32"	2 5/32"	1 19/32"
RBB-125-T	1 1/4"	3 11/16"	6 7/32"	3"	1 15/16"
RBB-150-T	1 1/2"	4"	6 7/32"	3 1/4"	2 1/8"
RBB-200-T	2"	4 3/4"	6 7/32"	3 1/2"	2 23/32"
RBB-250-T	2 1/2"	6 1/8"	10 1/32"	5 7/32"	3 11/32"
RBB-300-T	3"	6 31/32"	10 1/32"	5 1/2"	3 29/32"

SPECIFICATION DATA: Threaded Brass Ball Valve; Cast bronze machined body, brass full port ball, silicone bronze stem, Teflon seat, stainless steel handle nut, vinyl covered stainless steel handle, 400 PSI maximum operating pressure at 150°, and (F) N.P.T. threaded end connections.

DESIGN/APPLICATION DATA: RBB-T Series, ball valves are designed for use in fountain systems where flow regulation of nozzles and smaller diameter piping systems is required. The compact, streamlined design allows for ease of handing, installation and operation.

- NOTES:**
1. For submersible applications remove valve handle once adjusted.
 2. Due to continuing product improvement program, Roman Fountains reserves the right to change the specifications without notice.

DRAWING NO.
3.706