




(877) 794-1802

RCVS SERIES, BRASS SPRING-LOADED CHECK VALVE

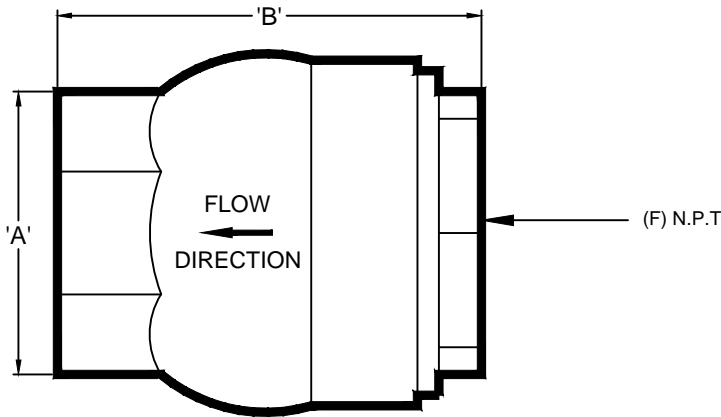

TECHNICAL DATA			
MODEL NO.	(F) N.P.T.	A	B
RCVS-050	1/2"	1"	2 1/8"
RCVS-075	3/4"	1 3/8"	2 5/16"
RCVS-100	1"	1 17/32"	2 9/16"
RCVS-125	1 1/4"	2 3/32"	3 3/32"
RCVS-150	1 1/2"	2 1/8"	3 3/16"
RCVS-200	2"	2 19/32"	3 3/4"

SPECIFICATION DATA: Brass Spring-Loaded Check Valve; Machined cast bronze body, disc holder and tail piece to ASTM B584, bronze spring, Buna disc, threaded N.P.T. connections.

DESIGN/APPLICATION DATA: RCVS Series spring check valves are designed and manufactured for use in piping systems where a possibility of back-siphoning exists, primarily from an upper pool level to a lower pool elevation. Available in a standard sizes, they are installed on display and filter piping systems.

NOTES: 1. WHEN INSTALLING PIPE FITTING INTO VALVE THREAD ON INLET SIDE, DO NOT OVER-TIGHTEN FITTING OR, IT MAY CAUSE DISC TO HOLD OPEN.

2. Due to continuing product improvement program, Roman Fountains reserves the right to change the specifications without notice.

DRAWING NO.
3.714