




(877) 794-1802

# RUV-T2 SERIES, ULTRAVIOLET SANITIZER/CLARIFIER SYSTEM

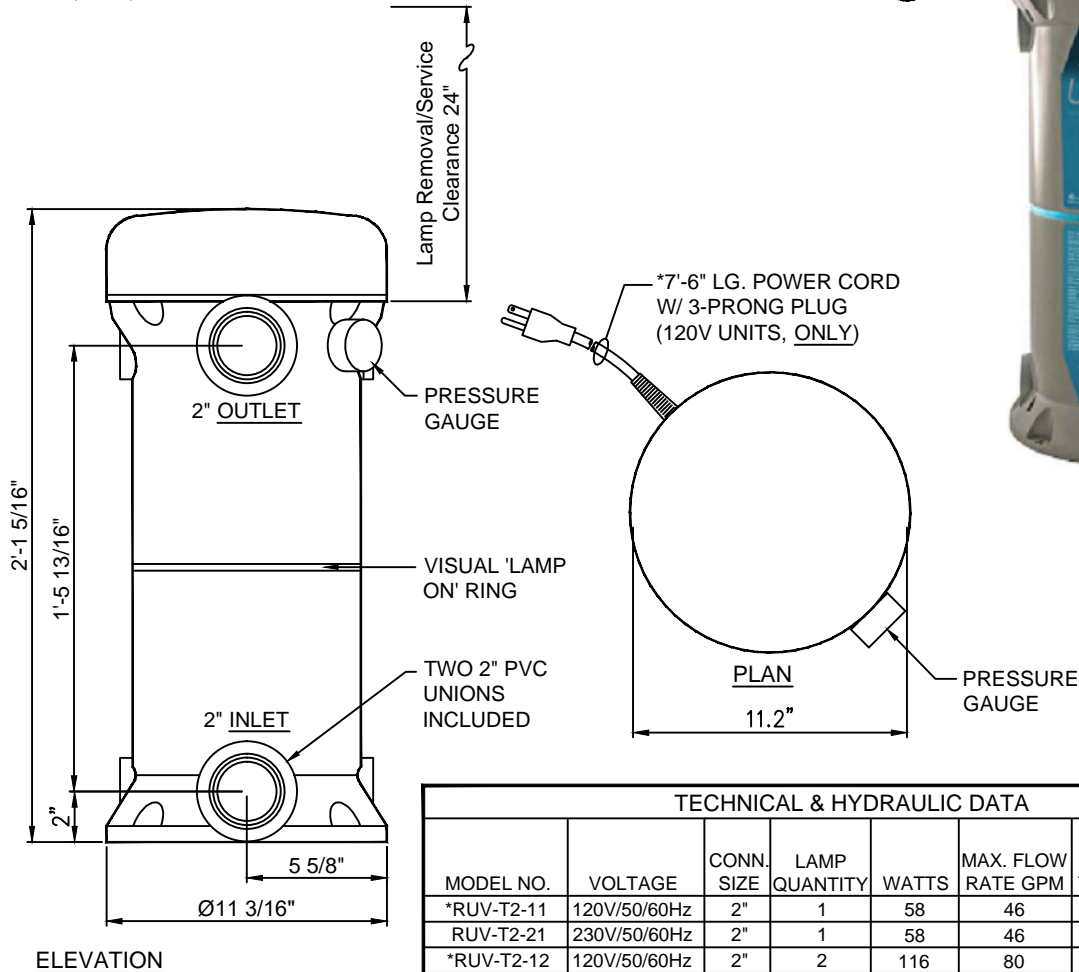

TECHNICAL & HYDRAULIC DATA						
MODEL NO.	VOLTAGE	CONN. SIZE	LAMP QUANTITY	WATTS	MAX. FLOW RATE GPM	MAX. POOL VOLUME 8 HR. TURNOVER (GAL)
*RUV-T2-11	120V/50/60Hz	2"	1	58	46	22080
RUV-T2-21	230V/50/60Hz	2"	1	58	46	22080
*RUV-T2-12	120V/50/60Hz	2"	2	116	80	38400
RUV-T2-22	230V/50/60Hz	2"	2	116	80	38400
*RUV-T2-13	120V/50/60Hz	2"	3	174	130	62400
RUV-T2-23	230V/50/60Hz	2"	3	174	130	62400

Notes: 1. 230V units are provided with blunt cut cord end only, for hard wiring; plug not included.  
2. An optional 'flow/no-flow' switch is available for this unit; contact factory for details

**SPECIFICATION DATA:** Ultraviolet Sanitizer featuring same size housing for three (3) different models, all of which are field convertible from one lamp to two, or three lamp system. Unit shall be a Roman Fountains Series RUV-T2 Series Model \_\_\_\_, rated at \_\_\_\_ volts, 50/60 Hz. These U.V. units are rated for 120 or 230 volt, single phase, 50/60Hz power and shall be equipped with a 7'-6" long power cord with 3-prong plug (120V units only, see \*Note above), 9" diameter corrosion resistant polymeric reactor vessel, stainless steel internal lamp reflectors, electrical enclosure bonnet suitable for outdoor installation, PVC Inlet/Outlet unions with 2" socket connections, pressure switch to prevent operation when water is not flowing, dual scale (PSI/kPa) pressure gauge, 360 degrees 'Lamp On' visual ring, UV lamp(s) rated for 13,000 hours of continuous use and shall be fully replaceable without requiring special tools. Additionally, four inlet ports and four outlet ports are provided to accommodate multi-directional piping to and from the UV system and six blank caps are provided to close unused plumbing ports after inlet/outlet selection.

**NOTE:** Due to our continuing product improvement, Roman Fountains reserves the right to change the specifications without notice.

DRAWING NO.  
**6.305**