





(877) 794-1802

RPCP/RLCP-SERIES, PUMP/ LIGHTING CONTROL PANEL

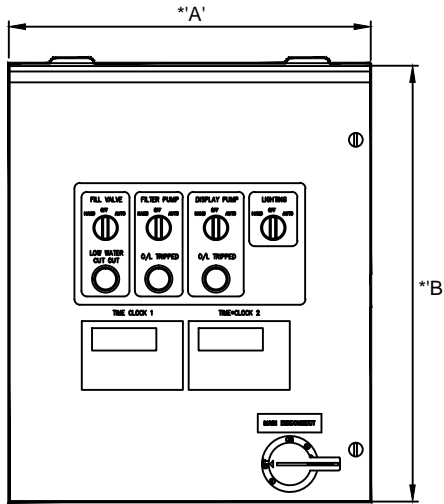

FRONT VIEW

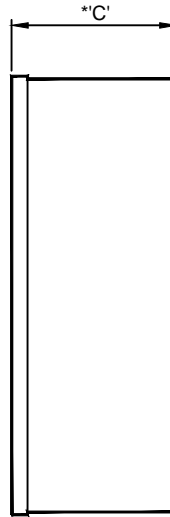

SIDE VIEW



'TYPICAL'

ENCLOSURE SIZE VARIES WITH FUNCTIONS & FEATURES. PLEASE CONSULT FACTORY FOR 'NOT TO EXCEED' DIMENSIONS FOR SPECIFIC UNIT.

DISPLAY PUMP	FILTER PUMP	LTG. QTY.	POWER REQ'D.
_ HP	_ HP	()	**

NOTE: WALL-MOUNT CONTROL PANEL IN AN AREA WHICH WILL AT ALL TIMES MEET OR EXCEED THE MINIMUM CLEARANCE REQUIREMENTS SET FORTH BY LOCAL AND THE NATIONAL ELECTRICAL CODES.

NOTE: THIS CONTROL PANEL SHALL NOT BE SIZED FOR NOR CONTAIN CIRCUITS FOR: SUMP PUMP, VENTILATION BLOWER, UTILITY LIGHT FIXTURES, CONVENIENCE OUTLET OR ANY OTHER LOADS NOT SPECIFIED UNDER THIS CONTROL PANEL DESCRIPTION.

NOTE: THIS REPRESENTS A "TYPICAL" PUMP/LIGHTING CONTROL PANEL CONFIGURATION. ACTUAL PANEL WILL BE PROJECT SPECIFIC DIFFER FROM THIS DETAIL.

⚡ DANGER ⚡

FATAL ELECTRICAL SHOCK CAN OCCUR IF FOUNTAIN ELECTRICAL EQUIPMENT IS NOT INSTALLED PROPERLY. THIS EQUIPMENT SHOULD ONLY BE INSTALLED BY QUALIFIED ELECTRICIANS WITH PROPER GROUNDING AND GROUND FAULT CIRCUIT INTERRUPTION BREAKERS IN ACCORDANCE WITH NATIONAL ELECTRICAL CODE, SECTION 680, AND ALL OTHER APPLICABLE SECTIONS OF THE CODE.

NOTE: 'DEAD FRONT' ENCLOSURES AVAILABLE; CONSULT FACTORY

SPECIFICATION DATA: U.L. 508 Listed Custom Control Panel, consisting of main disconnect, power distribution breakers (Class 'A' GFCI as required); pump contactors w/overload relay(s); lighting contactor(s); water level makeup/low level equipment protection circuit(s), 7 day/24 hour electronic time clock(s), 3-pos. H.O.A. selector switches and field connection terminal blocks. The panel is pre-wired in a NEMA 4 enclosure and factory tested with all loads, circuits and switching functions verified prior to delivery.

DESIGN/APPLICATION DATA: Pump/lighting control panels are designed for use on fountains and reflecting pools where automatic control is required for display and filtration pumps plus lighting control circuits. Pre-engineered and factory tested, they are built under the auspices of Underwriters Laboratories and include a U.L. 508 label. Available in a range of horsepower configurations, each panel is complete with a dual function water level/low level cutoff relay control board and time clock control.

NOTE: Due to our continuing product improvement program, Roman Fountains reserved the right to change the specifications without notice.

DRAWING NO.
7.311