





(800) 794-1801

# RSBK-P SERIES, SINGLE PVC SPRAY RING KIT W/ LED LIGHTS

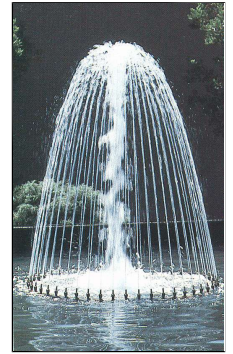

### OPERATING DATA:

NOISE: \_\_\_\_\_ Low to Moderate  
 VISIBILITY: \_\_\_\_\_ Good  
 SPLASH/MIST: \_\_\_\_\_ Low to Moderate  
 WIND STABILITY: \_\_\_\_\_ Poor  
 AERATION QUALITY: \_\_\_\_\_ Good

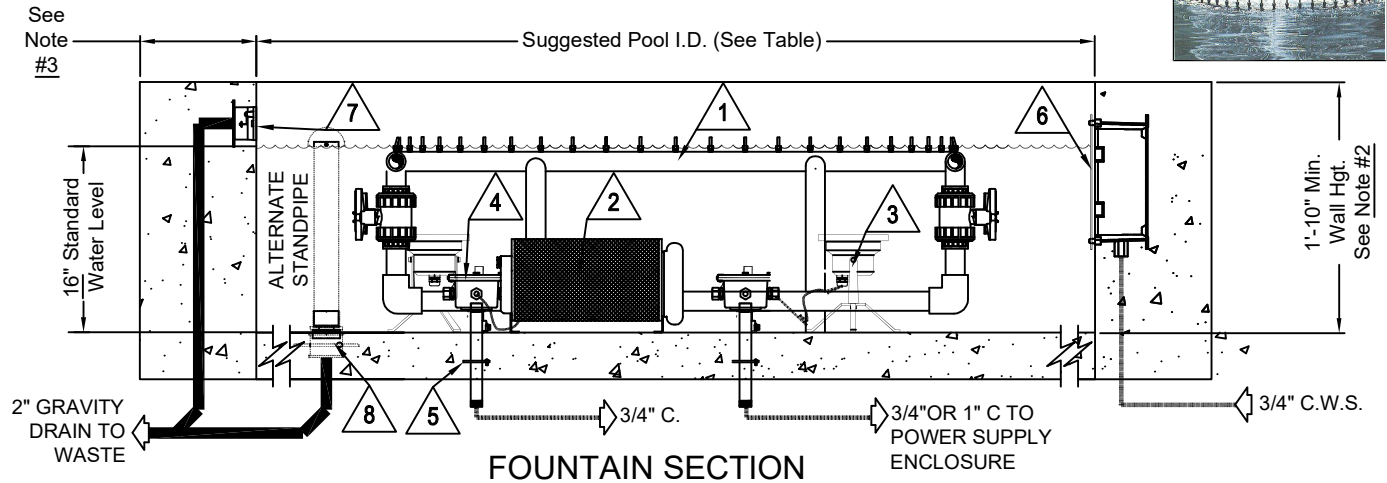

### TECHNICAL DATA

Model No./ Suggested Pool I.D.	1 Spray Ring Dia.	Nominal Spray Height	2 SUB. PUMP TYPE/QTY.	3 SUB. LIGHT TYPE/QTY.	4 SUB. J-BOX TYPE/QTY.	5 WATERSTOP TYPE/QTY.	6 WATER MAKE-UP TYPE/QTY.	7 SIDEWALL OVERFLOW TYPE/QTY.	8 FLOOR DRAIN TYPE/QTY.	POWER SUPPLY ENCLOSURE
RSBK-36-P-LED-W 12'-0"	36"	48"	RHSP-033 (1)	RFL-FS-LED-W (2)	RJB-1-075-C (1) RJB-2-075-C (1)	RWS-075-L (2)	RNB-075-WN (1)	ROVS-200-W (1)	RFD-200 (1)	RPCP/RLCP
RSBK-48-P-LED-W 12'-0"	48"	72"	RHSP-033 (1)	RFL-FS-LED-W (3)	RJB-1-075-C (1) RJB-3-100-C (1)	RWS-075-L(1) RWS-100-L(1)	RNB-075-WN (1)	ROVS-200-W (1)	RFD-200 (1)	RPCP/RLCP
RSBK-60-P-LED-W 12'-0"	60"	72"	RHSP-050 (1)	RFL-FS-LED-W (4)	RJB-1-075-C (1) RJB-4-100-C (1)	RWS-075-L(1) RWS-100-L(1)	RNB-075-WN (1)	ROVS-200-W (1)	RFD-200 (1)	RPCP/RLCP
RSBK-72-P-LED-W 16'-0"	72"	96"	RHSP-075 (1)	RFL-FS-LED-W (6)	RJB-1-075-C (1) RJB-6-100-C (1)	RWS-075-L(1) RWS-100-L(1)	RNB-075-WN (1)	ROVS-200-W (1)	RFD-200 (1)	RPCP/RLCP

**SPECIFICATION DATA:** Single PVC Spray Ring Fountain Kit; PVC spray ring with adjustable brass nozzles (.125" orifice), bronze U.L. listed submersible pump, stainless steel ETL listed submersible White LED lights, bronze submersible junction boxes, brass conduit slab penetration fittings, mechanical water makeup unit, overflow drain, floor drain, PVC manifold with support legs, hose and S.S. clamp connections and regulating and bypass valves. 120 volt, single phase power required with 20 Amp G.F.C.I. breaker for pump circuit, and 15 Amp G.F.C.I. breaker for lighting circuit, By Installer.

**DESIGN/APPLICATION DATA:** Roman Fountains RSBK-P Series, Single PVC Spray ring fountain kits provide a coordinated selection of components, pre-engineered and tested to produce a circular spray pattern using a series of clear streams precision jets, adjustable to create different spray effects. PVC Spray ring kits offer ease of installation and low installed equipment cost. Submersible White LED lighting is included for nighttime viewing.

- NOTES:**
1. Fountain Kit is Pre-Engineered for 16" operating water depth.
  2. Minimum poured wall height; any capping thickness is added to this dimension.
  3. 10" Minimum wall thickness required for sidewall type overflow fitting; 8", for standpipe type overflow fitting.
  4. Leave ample cord length; Do not cut short.
  5. Due to continuing product improvement program, Roman Fountains reserves the right to change the specifications without notice.

DRAWING NO.  
**2.103**