


## RDDK SERIES, DUAL BRASS SPRAY RING KIT W/ LED LIGHTS

**OPERATING DATA:**

NOISE: \_\_\_\_\_ Low to Moderate  
 VISIBILITY: \_\_\_\_\_ Good  
 SPLASH/MIST: \_\_\_\_\_ Low to Moderate  
 WIND STABILITY: \_\_\_\_\_ Fair  
 AERATION QUALITY: \_\_\_\_\_ Good

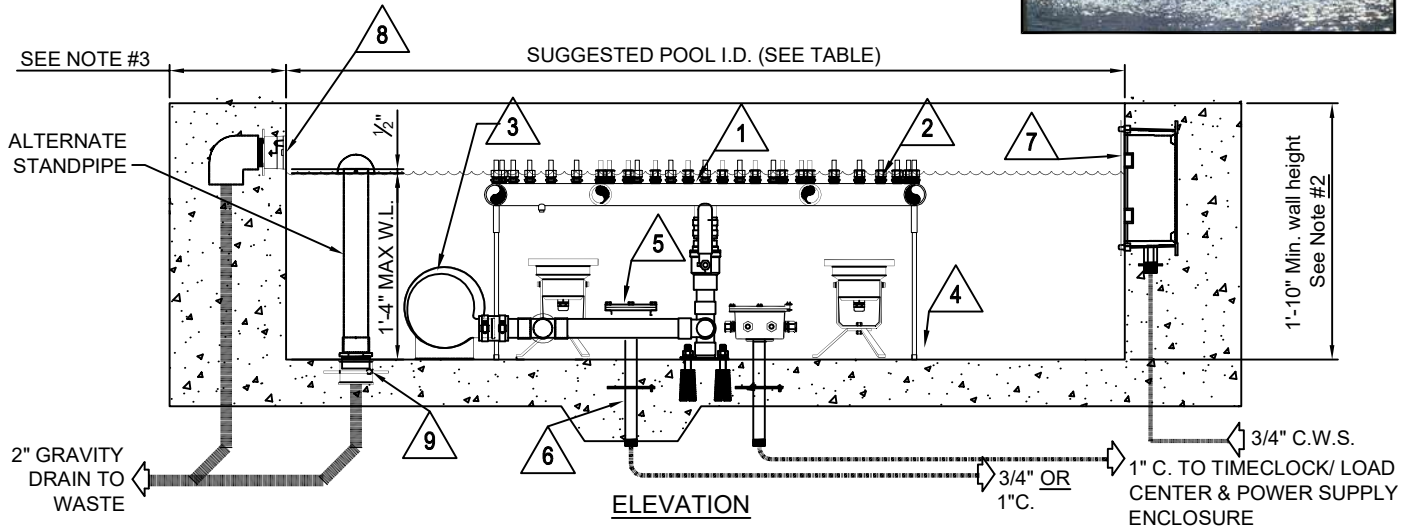

**TECHNICAL DATA**

Model No./ SUGGESTED POOL I.D.	1 Spray Ring Diameter INNER-OUTER	2 Nominal Spray Height INNER-OUTER	3 SUB PUMP TYPE/QTY.	4 SUB. LIGHT TYPE/QTY.	5 SUB. J-BOX TYPE/QTY.	6 WATERSTOP TYPE/QTY.	7 WATER MAKE-UP TYPE/QTY.	8 SIDEWALL OVERFLOW TYPE/QTY.	9 FLOOR DRAIN TYPE/QTY.	POWER SUPPLY ENCLOSURE
RDDK-1836-B-LED-W 6'-0"	18" - 36"	48" - 24"	RHSP-050 (1)	RFL-FS-LED-W (3)	RJB-1-075-C(1) RJB-3-100-C(1)	RWS-075-L(1) RWS-100-L(1)	RNB-075-WN (1)	ROVS-200-W (1)	RFD-200 (1)	RPCP/RLCP
RDDK-2448-B-LED-W 8'-0"	24" - 48"	48" - 24"	RHSP-050 (2)	RFL-FS-LED-W (3)	RJB-2-075-C(1) RJB-3-100-C(1)	RWS-075-L(1) RWS-100-L(1)	RNB-075-WN (1)	ROVS-200-W (1)	RFD-200 (1)	RPCP/RLCP
RDDK-3672-B-LED-W 12'-0"	36" - 72"	72" - 36"	RHSP-100 (2)	RFL-FS-LED-W (6)	RJB-2-075-C(1) RJB-6-100-C(1)	RWS-075-L(1) RWS-100-L(1)	RNB-075-WN (1)	ROVS-200-W (1)	RFD-200 (1)	RPCP/RLCP
RDDK-4896-B-LED-W 14'-0"	48" - 96"	72" - 48"	RHSP-075 (3)	RFL-FS-LED-W (8)	RJB-4-100-C(2) RJB-3-100-C(1)	RWS-100-L (3)	RNB-075-WN (1)	ROVS-200-W (1)	RFD-200 (1)	RPCP/RLCP

**SPECIFICATION DATA:** Dual Brass Spray Ring Fountain Kit; Brass spray rings with adjustable brass nozzles(.187" orifice), bronze U.L. listed submersible pump(s), stainless steel ETL. listed submersible White LED lights, UL listed LED Power supply enclosure with time clock/load center, bronze submersible junction box(es), brass conduit slab penetration fittings, mechanical water makeup unit, overflow drain, floor drain, copper manifolding with support feet, hose and S.S. clamp connections and regulating and bypass valves. 120 volt, single phase power required with 20 Amp G.F.C.I. breaker for each pump circuit, and 15 Amp G.F.C.I. breaker for lighting circuit (230V., 1 Phase, 3-Wire required for RDDK-3672).

**DESIGN/APPLICATION DATA:** Roman Fountains RDDK-Series, Dual Brass Spray ring fountain kits provide a coordinated selection of components, pre-engineered and tested to produce dual circular spray patterns using a series of clear stream precision jets, adjustable to create six different spray effects. Dual Brass Spray ring kits offer ease of installation and low installed equipment cost. Submersible White LED lighting is included for nighttime viewing.

- NOTES:**
1. Fountain Kits is Pre-Engineered for a 16" operating water depth.
  2. Minimum poured wall height; any capping thickness is added to this dimension.
  3. 10" Minimum wall thickness required for sidewall type overflow fitting; 8", for standpipe type overflow fitting.
  4. Leave ample cord length; Do not cut short.
  5. Remove valve handles once adjusted.
  6. Consult factory for pump load center/time clock assemblies.
  7. Due to continuing product improvement program, Roman Fountains reserves the right to change the specifications without notice.