





(877) 794-1802

# RPJ-125 ADJUSTABLE PRECISION JETS



PLAN VIEW

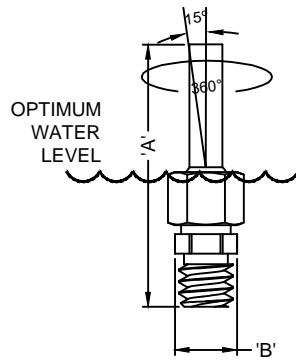

NOTE: RPJ-125 REQUIRES A  
5/16"-18 MACHINE THREAD;  
NOT A PIPE THREAD

ELEVATION

OPERATING DATA:  
 NOISE: \_\_\_\_\_ Low to Medium  
 VISIBILITY: \_\_\_\_\_ Low  
 SPLASH/MIST: \_\_\_\_\_ Medium  
 WIND STABILITY: \_\_\_\_\_ Low  
 AERATION QUALITY: \_\_\_\_\_ Low



3D IMAGE

**SPECIFICATION DATA:** Adjustable Precision Jets; three-piece machined brass construction, adjustable to 15° off vertical in a 360° cone, male threaded connection.

**DESIGN/APPLICATION DATA:** RPJ Series precision jet produces a delicate, clear stream of water. Precision jets include an integral adjustment feature to allow a variety of spray angles (0-15° off center axis). This product is also used on Roman Fountain spray rings.

- NOTES:**
1. Fine screening at pump, half the diameter of jet orifice or smaller to minimize nozzle clogging recommended.
  2. Due to continuing product improvement program, Roman Fountains reserves the right to change the specifications without notice.

TECHNICAL AND HYDRAULIC DATA													
MODEL NO.	ORIFICE SIZE	SUCTION SCREENING REQUIRED	MACHINE THREAD SIZE	DIM 'A'	DIM 'B'	MAX. SPRAY HEIGHT	2'	4'	6'	8'	10'	12'	15'
							GPM	.40	.60	.76	.87		
RPJ-125	.125"	.065"	5/16"-18	1-1/2"	7/16"	GPM	.40	.60	.76	.87			
							HEAD	4'	6'	10'	12'		

DRAWING NO.  
**1.201**