

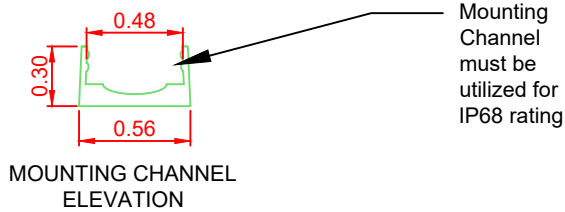


(877) 794-1802

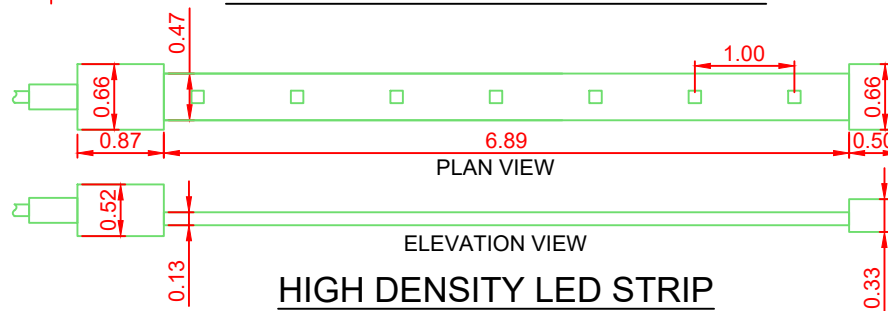

NOTE: PICTURED STRANDS IN ORDER FROM TOP TO BOTTOM: RFSL-LED-W-S27, RFSL-LED-W-H27, RFSL-LED-W-S65, RFSL-LED-W-H65.

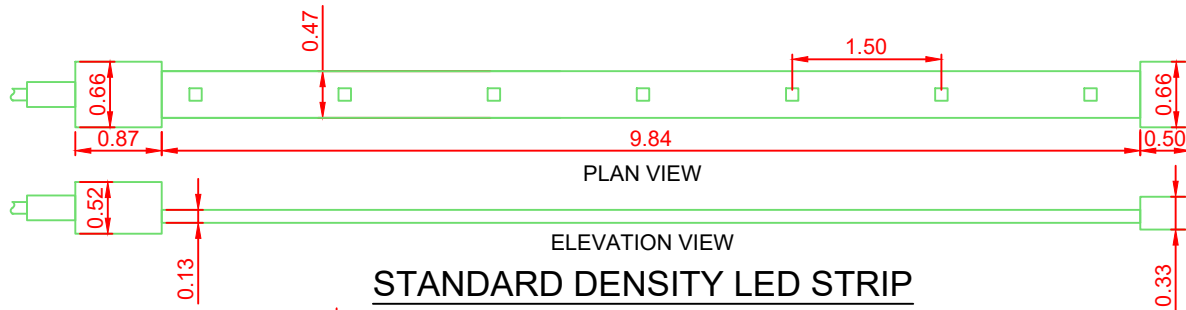

TECHNICAL DATA						
MODEL NO.	CUT POINTS	LIGHT COLOR	OUTPUT LUMENS	MAXIMUM LENGTH	POWER USAGE	LED CHIPS
RFSL-LED-W-S27	9.84"	"WARM" (2700K)	113/FT.	65 FT.	1.22 WATTS/FT	8/FOOT
RFSL-LED-W-S40	9.84"	"COOL" (4000K)	122/FT.	65 FT.	1.22 WATTS/FT	8/FOOT
RFSL-LED-W-S65	9.84"	"COOL" (6500K)	122/FT.	65 FT.	1.22 WATTS/FT	8/FOOT
RFSL-LED-W-H27	6.88"	"WARM" (2700K)	226/FT.	32 FT.	2.44 WATTS/FT	12/FOOT
RFSL-LED-W-H30	6.88"	"WARM" (3000K)	226/FT.	32 FT.	2.44 WATTS/FT	12/FOOT
RFSL-LED-W-H40	6.88"	"COOL" (4000K)	244/FT.	32 FT.	2.44 WATTS/FT	12/FOOT
RFSL-LED-W-H65	6.88"	"COOL" (6500K)	244/FT.	32 FT.	2.44 WATTS/FT	12/FOOT

IMPORTANT NOTE: To maintain IP68 Rating, lights MUST be mounted in mounting channel. These lights cannot be installed in a submerged setting on a radius.



NOTES: 1. 24VDC Power supply required to operate fixtures. Contact factory for requirements.
2. Due to our continuing product improvement, Roman Fountains reserves the right to change the specifications without notice.

SPECIFICATION DATA: 24VDC U.L. Listed 2108 and 676 LED Linear Strip Lighting; submersible/waterproof IP68 rated with 120° Beam angle, type 2835 LED chips, UV, chlorine & saltwater resistant. 4" to 24" 22/2 AWG SJOW cable lengths. Supplied with mounting channel (required for UL 676), NOT FIELD-CUTTABLE.

DRAWING NO.
5.114